




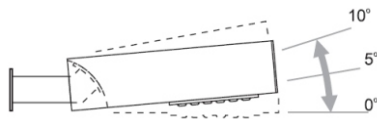

Fixture BERNA K 24



OPTICS

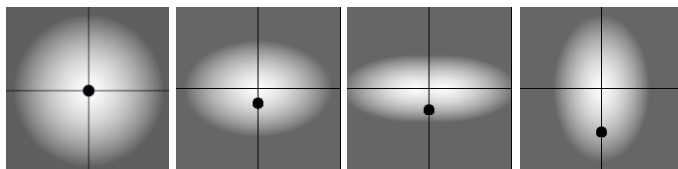

„S”

„AS”

„ASW”

„ASP”

DETAILED DESCRIPTION

| INDEX | NAME | DIMENSIONS [cm] | LIGHT SOURCE | | | FIXTURE | | | WIND m ² | WEIGHT kg |
|-------|------------|-----------------|--------------|------|--------|---------|------|--------|------------------------|--------------|
| | | L/B/H | W | lm | lm / W | W | lm | lm / W | | |
| - | BERNA K 24 | 50/15/10 | 24 | 3700 | 154 | 30 | 3500 | 117 | 0,08 | 4 |

Data for: Ra > 80, 4000K, 700mA. Source of light and integrated control gear, replacement only by the manufacturer's service.



PRODUCT DESCRIPTION

Modern fixture adapted to be mounted both on a facade and on a post. Body made of aluminum forms the base for sealed LED modules and equipment chamber. Adjustable handle allows easy mounting on facade or post.

TECHNICAL SPECIFICATIONS


| | |
|------------------------|--|
| Voltage | 230 V |
| Source power / fixture | Recommended: Integrated 24 W/30 W |
| Lifetime | 70.000 h LB 80/20 |
| Optics | S AS ASP ASW |
| Ambient Temperature | -30 ÷ +45 |
| Light color | 4000 3000 * |
| Ingress protection | IP65 |
| Protection class | I II * |
| CE | Yes |

* choice

MECHANICAL DATA

| | |
|----------------------|---|
| Foundation | - |
| Column/body material | Aluminium |
| Lampshade | - |
| Metal color | <div style="display: flex; align-items: center;"> <div style="width: 20px; height: 20px; background-color: #f0f0f0; margin-right: 5px;"></div> White 9003 <div style="width: 20px; height: 20px; background-color: #808080; margin-right: 5px; margin-top: 5px;"></div> Grey 7043 <div style="width: 20px; height: 20px; background-color: #404040; margin-right: 5px; margin-top: 5px;"></div> Graphite 7016 <div style="width: 20px; height: 20px; background-color: #202020; margin-right: 5px; margin-top: 5px;"></div> Black 9005 <div style="margin-left: 10px; border: 1px solid black; padding: 2px;">RAL*</div> </div> |

ON ORDER



** on special order