





Park Lantern BOVER K 4,0 COB

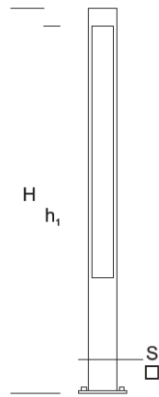

OPTICS



„S”



DETAILED DESCRIPTION

INDEX	NAZWA NAME	WYMIARY / DIMENSIONS (cm)		ŹRÓDŁO ŚWIATEŁA / SOURCE OF LIGHT			OPRAWA / FIXTURE			FUNDAMENT FOUNDATION
		H/h ₁ /h ₂	S	W	lm	lm / W	W	lm	lm / W	
190-1111-400009	BOVER K LP 4,0 COB	400/395	15x15	23,5	4070	173	26	3120	120	FBK-90/18

Data for: Ra > 80, 4000K, 700mA. Source of light and integrated control gear, replacement only by the manufacturer's service.



PRODUCT DESCRIPTION

Modern LED lantern with a square cross-section. Its column is made of aluminium profiles joined together. The lower part of LP (in the bay) contains a fuse plate and power supply unit. In the upper part, the accessories chamber is closed by a plate with a sealed LED module (with the lens) mounted from the outside and a heat-sink - from the inside. Optionally, an IP 54 plug socket can be mounted.

HEIGHT: 4 m

TECHNICAL SPECIFICATIONS


Voltage	230 V
Source power / fixture	Recommended: Integrated 26 W/3120 lm
Lifetime	70.000 h LB 80/20
Optics	S
Ambient temperature	-30 ÷ +45
Light color	4000 3000 *
Ingress Protection	IP65
Protection class	I II *
CE	Yes

* choice

MECHANICAL DATA

Foundation	FBK-90/18
Column/body material	Aluminium
Lightshade	PMMA
Metal color	<div style="display: flex; align-items: center;"> <div style="width: 20px; height: 20px; background-color: #f0f0f0; margin-right: 5px;"></div> White 9003 <div style="width: 20px; height: 20px; background-color: #808080; margin-right: 5px; margin-top: 5px;"></div> Grey 7043 <div style="width: 20px; height: 20px; background-color: #404040; margin-right: 5px; margin-top: 5px;"></div> Graphite 7016 <div style="width: 20px; height: 20px; background-color: #202020; margin-right: 5px; margin-top: 5px;"></div> Black 9005 <div style="margin-left: 10px; border: 1px solid black; padding: 2px;">RAL*</div> </div>

ON ORDER



** on special order