




## Garden Lamp KALUX D 1,2

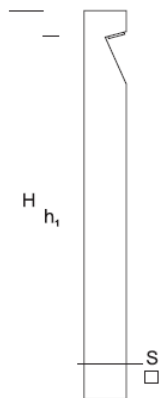

### PRODUCT DESCRIPTION

The square aluminium column with wooden elements and a distinctive diagonal undercut allows the LED light source to be fixed at an angle to illuminate pathways or create other accents in the area.

HEIGHT: 1,2 m

### TECHNICAL SPECIFICATIONS


Voltage	230 V
Source power / fixture	Recommended: Integrated 8,5 W/1000 lm
Lifetime	70.000 h LB 80/20
Ambient temperature	-30 ÷ +45
Light color	4000 3000 *
Ingress Protection	IP65
Protection class	I II *
CE	Yes

\*choice

### MECHANICAL DATA

Foundation	FBK-50/14,5														
Column/body material	Aluminium/wood														
Lampshade	-														
Metal color	<table border="1"> <tr><td></td><td>White 9003</td></tr> <tr><td></td><td>Grey 7043</td></tr> <tr><td></td><td>Graphite 7016</td></tr> <tr><td></td><td>Black 9005</td></tr> <tr><td><b>RAL*</b></td><td></td></tr> <tr><td></td><td>Light wood</td></tr> <tr><td></td><td>Dark wood</td></tr> </table>		White 9003		Grey 7043		Graphite 7016		Black 9005	<b>RAL*</b>			Light wood		Dark wood
	White 9003														
	Grey 7043														
	Graphite 7016														
	Black 9005														
<b>RAL*</b>															
	Light wood														
	Dark wood														
Wood color	Light wood Dark wood														

### ON ORDER



\*\* on special order

### DETAILED DESCRIPTION

INDEX	NAZWA NAME	WYMIARY / DIMENSIONS (cm)		OPRAWA / FIXTURE			FUNDAMENT FOUNDATION
		H/h <sub>1</sub>	S	W	lm	lm / W	
172-0001-000006	KALUX D LO 1,2	120/110/-	12x12	8,5	1000	124	FBK-50/14,5

Data for: Ra > 80, 4000K, 700mA. Source of light and integrated control gear, replacement only by the manufacturer's service.