



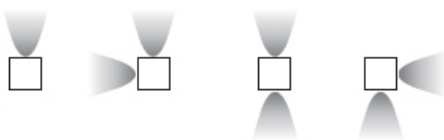

**ELMARCO**  
GOOD FORM FOR LIGHTING

ELMARCO Technika Świetlna Sp. z o.o. Sp. K.  
Ul. Krzemowa 7, 81-577 Gdynia,  
tel. (58) 552 84 27

## Garden Lamp KALUX 1,8 (0,6/1,2)

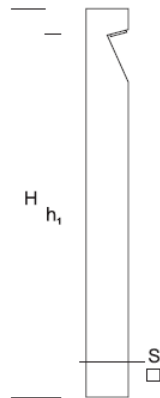

Kierunki światła do wyboru  
Light angle – a variety of options



### PRODUCT DESCRIPTION

Square aluminum column with a characteristic oblique undercut allows to fix LED light source at an angle that allows to illuminate paths or create other accents in the area.

Designed for: illumination of parks, areas around buildings, pedestrian and bicycle paths, gardens and public spaces.  
HEIGHT: 1,8 m

### TECHNICAL SPECIFICATIONS


Voltage	230 V
Source power / fixture	Recommended: Integrated 17 W/2100 lm
Lifetime	70.000 h LB 80/20
Ambient temperature	-30 ÷ +45
Light color	<input type="checkbox"/> 4000 <input type="checkbox"/> 3000 *
Ingress Protection	<b>IP65</b>
Protection class	<input type="checkbox"/> I <input type="checkbox"/> II *
CE	Yes

\* choice

### MECHANICAL DATA

Foundation	FBO-50/16
Column/body material	Aluminium
Lampshade	-
Metal color	<input type="checkbox"/> White 9003 <input type="checkbox"/> Grey 7043 <input type="checkbox"/> Graphite 7016 <input type="checkbox"/> Black 9005 <b>RAL*</b>

### ON ORDER



\*\* on special order

### DETAILED DESCRIPTION

INDEX	NAZWA NAME	WYMIARY / DIMENSIONS (cm)		ŹRÓDŁO ŚWIATŁA / SOURCE OF LIGHT			OPRAWA / FIXTURE			FUNDAMENT FOUNDATION
		H/h <sub>1</sub> /h <sub>2</sub>	S	W	lm	lm / W	W	lm	lm / W	
172-0024-000197	KALUX LO 1,8 (0,6/1,2)	180/53/173	12x12	16	2880	180	17	2100	120	FBO-50/16

Data for: Ra > 80, 4000K, 700mA. Source of light and integrated control gear, replacement only by the manufacturer's service.