





Fixture GEDANIA BIS 24

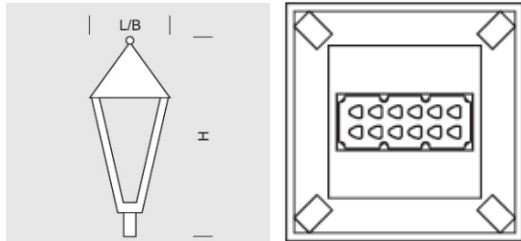

OPTICS

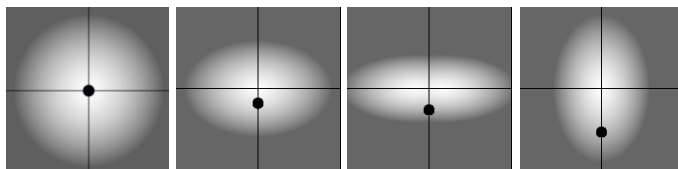

„S”

„AS”

„ASW”

„ASP”

DETAILED DESCRIPTION

INDEX	NAZWA NAME	DIMENSIONS [cm]	SOURCE OF LIGHT			FIXTURE			WIND	WEIGHT
		L/B/H	W	lm	lm / W	W	lm	lm / W	m ²	kg
195-1111-000091	GEDANIA BIS 24	35/35/70	24	3700	154	30	3050	102	0,07	4,5

Data for: Ra > 80, 4000K, 700mA. Source of light and integrated control gear, replacement only by the manufacturer's service.



PRODUCT DESCRIPTION

Universal classic fixture for mounting directly at posts (ř60 mm) or in arm-systems at a height of 3-5 m. Aluminum body forms a sealed chamber (closed with a plate) with a sealed LED module (with the lens) from the outside. The chamber is seated on profiles connected to its lower rosette, which also serves as a mounting for the fixture on a post.


TECHNICAL SPECIFICATIONS

Voltage	230 V
Source power / fixture	Recommended: Integrated 24 W/30 W
Lifetime	70.000 h LB 80/20
Optics	S AS ASP ASW
Ambient temperature	-30 +35
Light color	4000 3000 *
Ingress Protection	IP65
Protection class	I II *
CE	Yes

* choice

MECHANICAL DATA

Foundation	-
Column/body material	Aluminium
Lampshade	-
Metal color	




Grey 7043

Graphite 7016

Black 9005

RAL*

ON ORDER



** on special order