



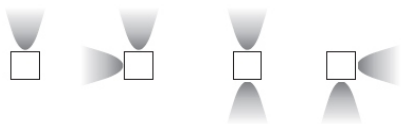

**ELMARCO**  
GOOD FORM FOR LIGHTING

ELMARCO Technika Świetlna Sp. z o.o. Sp. K.  
Ul. Krzemowa 7, 81-577 Gdynia,  
tel. (58) 552 84 27

## Garden Lamp BOLUX 1,8 (1,2/0,6)

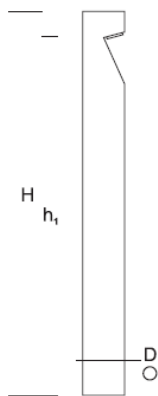

Kierunki światła do wyboru  
Light angle – a variety of options



### PRODUCT DESCRIPTION

Cylindrical aluminum column with a characteristic oblique undercut allows to fix the LED light source at an angle illuminating paths or create other accents in gardens, public spaces, especially in the composition of a two-element form.

HEIGHT: 1,8 m

### TECHNICAL SPECIFICATIONS


|                        |                                      |
|------------------------|--------------------------------------|
| Voltage                | 230 V                                |
| Source power / fixture | Recommended: Integrated 17 W/2100 lm |
| Lifetime               | 80.000 h LB 80/20                    |
| Ambient temperature    | -30 ÷ +45                            |
| Light color            | 4000 3000 *                          |
| Ingress Protection     | IP66                                 |
| Protection class       | I II *                               |
| CE                     | Yes                                  |

\* choice

### MECHANICAL DATA

|                      |  |
|----------------------|--|
| Foundation           | FBO-60/12,5  |
| Column/body material | Aluminium  |
| Lampshade            | -  |
| Metal color          | <div style="display: flex; align-items: center;"> <div style="width: 20px; height: 20px; background-color: #f0f0f0; margin-right: 5px;"></div> White 9003<br/> <div style="width: 20px; height: 20px; background-color: #808080; margin-right: 5px; margin-top: 5px;"></div> Grey 7043<br/> <div style="width: 20px; height: 20px; background-color: #404040; margin-right: 5px; margin-top: 5px;"></div> Graphite 7016<br/> <div style="width: 20px; height: 20px; background-color: #202020; margin-right: 5px; margin-top: 5px;"></div> Black 9005<br/> <div style="border: 1px solid black; padding: 2px; margin-left: 10px; margin-top: 5px;">RAL*</div> </div> |

### ON ORDER



\*\* on special order

### DETAILED DESCRIPTION

| INDEX          | NAZWA NAME             | WYMIARY / DIMENSIONS (cm)        |      | ŹRÓDŁO ŚWIATŁA / SOURCE OF LIGHT |      |        | OPRAWA / FIXTURE |      |        | FUNDAMENT FOUNDATION |
|----------------|------------------------|----------------------------------|------|----------------------------------|------|--------|------------------|------|--------|----------------------|
|                |                        | H/h <sub>1</sub> /h <sub>2</sub> | D    | W                                | lm   | lm / W | W                | lm   | lm / W |                      |
| 172-00.-000194 | BOLUX LO 1,8 (1,2/0,6) | 180/113/173                      | 13,3 | 16                               | 2880 | 180    | 17               | 2100 | 120    | FBO-60/12,5          |

Data for: Ra > 80, 4000K, 700mA. Source of light and integrated control gear, replacement only by the manufacturer's service.