




Park Lantern URBIN K 5/1

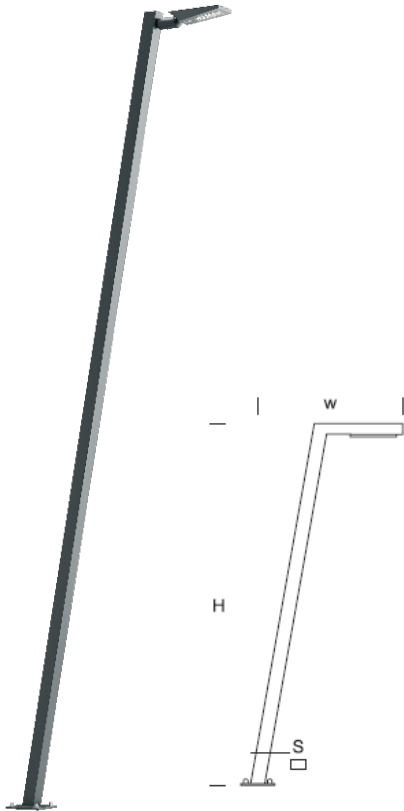

PRODUCT DESCRIPTION

Modern lantern made of rectangular aluminum profiles. Inclined form fits well with the architecture.

Model in four versions: Urbin, Urbin K, Urbin D, Urbin B equipped in proper fixture with required power, colour and optics.

HEIGHT: 5 m

TECHNICAL SPECIFICATIONS


Voltage	230 V
Source power / fixture	Recommended: Integrated 40 W/4600 lm
Lifetime	80.000 h LB 80/20
Optics	S AS ASP ASW
Ambient temperature	-30 ÷ +45
Light color	4000 3000 *
Ingress Protection	IP66
Protection class	I II *
CE	Yes

* choice

MECHANICAL DATA


Foundation	FBK-90/18
Column/body material	Aluminium
Lampshade	PMMA
Metal color	<div style="display: flex; align-items: center;"> <div style="width: 20px; height: 20px; background-color: #f0f0f0; margin-right: 5px;"></div> White 9003 <div style="width: 20px; height: 20px; background-color: #808080; margin-right: 5px; margin-top: 5px;"></div> Grey 7043 <div style="width: 20px; height: 20px; background-color: #404040; margin-right: 5px; margin-top: 5px;"></div> Graphite 7016 <div style="width: 20px; height: 20px; background-color: #202020; margin-right: 5px; margin-top: 5px;"></div> Black 9005 <div style="border: 1px solid black; padding: 2px; margin-top: 5px; margin-left: 10px;">RAL*</div> </div>

ON ORDER



** on special order

OPTICS

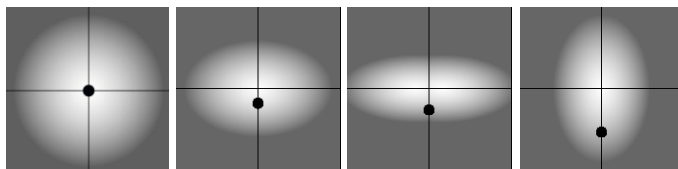

„S”

„AS”

„ASW”

„ASP”

DETAILED DESCRIPTION

INDEX	NAZWA NAME	WYMIARY / DIMENSIONS (cm)		ŹRÓDŁO ŚWIATEŁA / SOURCE OF LIGHT			OPRAWA / FIXTURE			FUNDAMENT FOUNDATION
		H/h ₁ /h ₂	w/S	W	lm	lm / W	W	lm	lm / W	
-	URBIN K LP 5/1	500/480	146/10x8	36	5400	142	40	4600	115	FBK-90/18

Data for: Ra > 80, 4000K, 700mA. Source of light and integrated control gear, replacement only by the manufacturer's service.