





Park Lantern WAY 4/2T

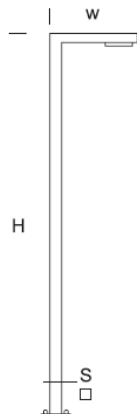

OPTICS

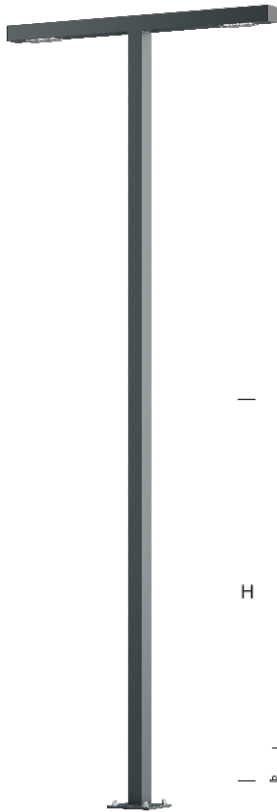

„S”

„AS”

„ASW”

„ASP”

DETAILED DESCRIPTION

INDEX	NAZWA NAME	WYMIARY / DIMENSIONS (cm)		ŹRÓDŁO ŚWIATEŁA / SOURCE OF LIGHT			OPRAWA / FIXTURE			FUNDAMENT FOUNDATION
		H/h ₁ /h ₂	w/S	W	lm	lm / W	W	lm	lm / W	
190-1111-310010	WAY LP 4/2T	400/390	80/10x8	48	7400	154	60	7000	117	FBK-90/18

Data for: Ra > 80, 4000K, 700mA. Source of light and integrated control gear, replacement only by the manufacturer's service.



PRODUCT DESCRIPTION

The structure is made of aluminum profiles. LED modules with modeled characteristics mounted in the arm booms. Shade: UV resistant polycarbonate.

Designed for: illumination of public spaces with special requirements.

HEIGHT: 4 m


TECHNICAL SPECIFICATIONS

Voltage	230 V
Source power / fixture	Recommended: Integrated 60 W/7000 lm
Lifetime	80.000 h LB 80/20
Optics	S AS ASP ASW
Ambient temperature	-30 ÷ +45
Light color	4000 3000 *
Ingress Protection	IP66
Protection class	I II *
CE	Yes

* choice

MECHANICAL DATA

Foundation	FBK-90/18
Column/body material	Aluminium
Lampshade	PMMA
Metal color	




Grey 7043

Graphite 7016

Black 9005

RAL*

ON ORDER



** on special order