Fixture WEGA I 48

















PRODUCT DESCRIPTION

Double-chamber LED fixture adapted to be mounted on a boom or directly at a post, at a height of 6-8~m. An angle of lighting (00, 50, 100 vertically and horizontally) can be adjusted.

Body made of a pressured aluminium cast forms a convection radiator. Lampshade made of tempered glass. Light source: LED panel with a system of lenses and reflector forming the required shape of light.

TECHNICAL SPECIFICATIONS

Voltage	230 V
Source power / fixture	Recommended: Integrated 48 W/52 W
Lifetime	70.000 h LB 80/20
Optics	S AS ASP ASW
Ambient temperature	-30 ÷ +45
Light color	4000 3000 *
Ingress Protection	IP65
Protection class	I II *
CE	Yes

*choice

MECHANICAL DATA

Foundation
Column/body material Aluminium

Lampshade -

300 mA

1050 mA

Metal color

2700°K

5000°K

**on special order




10kV

White 9003

Grey 7043

Graphite 7016 Black 9005

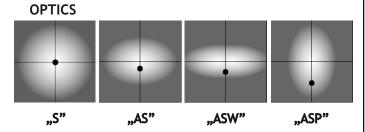

DETAILED DESCRIPTION

SEIVILLE SESSION FIGURE											
INDEX	NAME	DIMENSIONS [cm]] SOURCE OF LIGHT			FIXTURE			WIND	WEIGHT	
		L/B/H	W	lm	Im / W	W	lm	Im / W	m²	kg	
195-1111-000107	WEGA I 48	54/22/7,5	48	7400	154	52	6650	127	0,05	7	

ON ORDER

DIM

Data for: Ra > 80, 4000K, 700mA. Source of light and integrated control gear, replacement only by the manufacturer's service.

