




Park Lantern ELEW 5/1

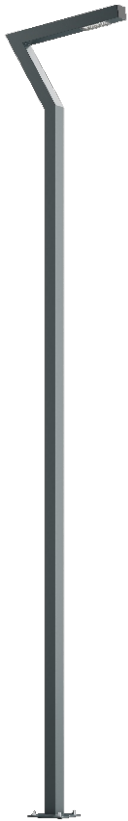

PRODUCT DESCRIPTION

Modern lantern built of rectangular aluminum profiles. The simple flat shape creates an elegant architectural element. In the boom a modular LED luminaire with excellent optical parameters and modeled characteristics of a street luminaire. The lenses used give a diffuse reflection effect reducing glare. UV-resistant polycarbonate diffuser.

HEIGHT: 5 m

TECHNICAL SPECIFICATIONS


Voltage	230 V
Source power / fixture	Recommended: Integrated 30 W/3500 lm
Lifetime	70.000 h LB 80/20
Optics	S AS ASP ASW
Ambient temperature	-30 ÷ +45
Light color	4000 3000 *
Ingress Protection	IP65
Protection class	I II *
CE	Yes

* choice

MECHANICAL DATA


Foundation	FBK-90/18										
Column/body material	Aluminium										
Lampshade	PMMA										
Metal color	<table border="0"> <tr> <td></td> <td>White 9003</td> </tr> <tr> <td></td> <td>Grey 7043</td> </tr> <tr> <td></td> <td>Graphite 7016</td> </tr> <tr> <td></td> <td>Black 9005</td> </tr> <tr> <td colspan="2" style="text-align: center;">RAL*</td> </tr> </table>		White 9003		Grey 7043		Graphite 7016		Black 9005	RAL*	
	White 9003										
	Grey 7043										
	Graphite 7016										
	Black 9005										
RAL*											

ON ORDER



** on special order

OPTICS

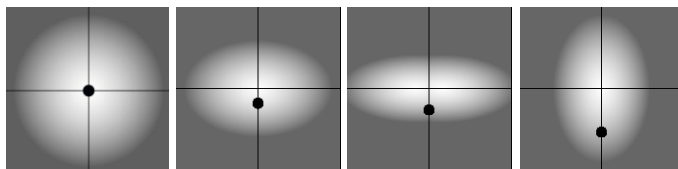

„S”

„AS”

„ASW”

„ASP”

DETAILED DESCRIPTION

INDEX	NAZWA NAME	WYMIARY / DIMENSIONS (cm)		ŹRÓDŁO ŚWIATEŁA / SOURCE OF LIGHT			OPRAWA / FIXTURE			FUNDAMENT FOUNDATION
		H/h ₁ /h ₂	w/S	W	lm	lm / W	W	lm	lm / W	
190-1111-510048	ELEW LP 5/1	500/390/-	80/10x8	24	3700	154	30	3500	117	FBK-90/18

Data for: Ra > 80, 4000K, 700mA. Source of light and integrated control gear, replacement only by the manufacturer's service.