





Fixture ARIA BIS 25 COB

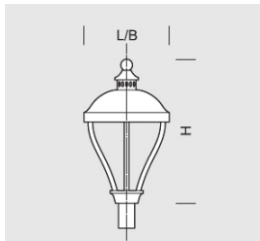

OPTICS

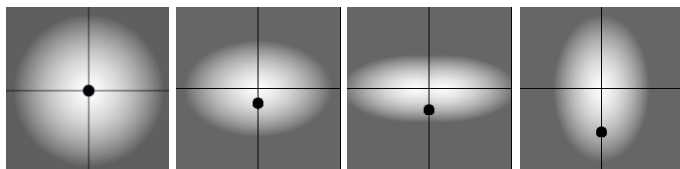

„S”

„AS”

„ASW”

„ASP”

DETAILED DESCRIPTION

INDEX	NAME	DIMENSIONS [cm]	LIGHT SOURCE			FIXTURE			WIND	WEIGHT
		L/B/H	W	lm	lm / W	W	lm	lm / W	m ²	kg
195-1111-000087	ARIA BIS 25 COB	38/38/62	23,5	4080	133	26	3500	140	0,06	3,5

Data for: Ra > 80, 4000K, 700mA. Source of light and integrated control gear, replacement only by the manufacturer's service.



PRODUCT DESCRIPTION

Classic fixture adapted for mounting directly at a post with 60mm diameter or in arm-system - Aria, Aria Bis at a height of 3-4 m, Aria Plus at a height of 5-6m. Aluminum body forms a sealed chamber for fittings closed with a plate and a sealed tight LED module (with the lens) attached to it at the lampshade's side. The chamber is seated on shaped profiles connected to its lower rosette, which serves as a mounting for the fixture on a post.


TECHNICAL SPECIFICATIONS

Voltage	230 V
Source power / fixture	Recommended: Integrated 23,5 W/26 W
Lifetime	70.000 h LB 80/20
Optics	S AS ASP ASW
Ambient temperature	-30 ÷ +45
Light color	4000 3000*
Ingress Protection	IP65
Protection class	I II *
CE	Tak

* choice

MECHANICAL DATA

Foundation	-
Fixture material	Aluminium
Lampshade	-
Metal color	




Grey 7043

Graphite 7016

Black 9005

ON ORDER



** on special order