





## Fixture ARIA BIS 48

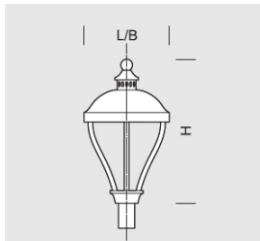

### OPTICS

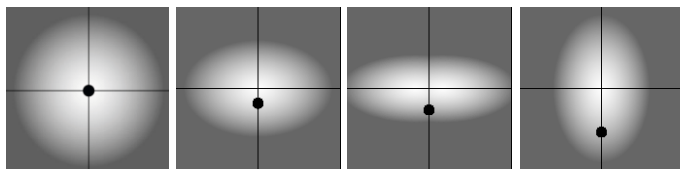

„S”

„AS”

„ASW”

„ASP”

### DETAILED DESCRIPTION

INDEX	NAME	DIMENSIONS [cm]	LIGHT SOURCE			FIXTURE			WIND	WEIGHT
		L/B/H	W	lm	lm / W	W	lm	lm / W	m <sup>2</sup>	kg
195-1111-000086	ARIA BIS 48	38/38/62	48	7400	153	60	6480	108	0,06	3,5

Data for: Ra > 80, 4000K, 700mA. Source of light and integrated control gear, replacement only by the manufacturer's service.



### PRODUCT DESCRIPTION

Classic fixture adapted for mounting directly at a post with 60mm diameter or in arm-system - Aria, Aria Bis at a height of 3-4 m, Aria Plus at a height of 5-6m. Aluminum body forms a sealed chamber for fittings closed with a plate and a sealed tight LED module (with the lens) attached to it at the lampshade's side. The chamber is seated on shaped profiles connected to its lower rosette, which serves as a mounting for the fixture on a post.


### TECHNICAL SPECIFICATIONS

Voltage	230 V
Source power / fixture	Recommended: Integrated 48 W/60 W
Lifetime	70.000 h LB 80/20
Optics	<b>S</b> <b>AS</b> <b>ASP</b> <b>ASW</b>
Ambient temperature	-30 ÷ +45
Light color	<b>4000</b> <b>3000</b> *
Ingress Protection	<b>IP65</b>
Protection class	<b>I</b> <b>II</b> *
CE	Tak

\* choice

### MECHANICAL DATA

Foundation	-
Fixture material	Aluminium
Lampshade	-
Metal color	




Grey 7043

Graphite 7016

Black 9005

### ON ORDER



\*\* on special order