



Fixture DECO 32 M







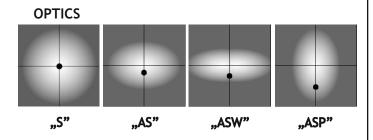

PRODUCT DESCRIPTION

Classic arm mount luminaire, fi-60 mm at a height of 5-8 m. The aluminum body is a sealed chamber, closed with a plate, on which a sealed LED module with lenses of selected optics is mounted on the glass side, and a heat sink and power supply on the inside. The chamber is connected to the top rosette, which, in addition to its decorative function, is a mounting bracket. The glass is made of clear or frosted glass.

TECHNICAL SPECIFICATIONS

Voltage	230 V							
Source power / fixture	Recommended: Integrated 32 W/39 W							
Lifetime	70.000 h LB 80/20							
Optics	S AS ASP ASW							
Ambient temperature	-30 ÷ +45							
Light color	4000 3000 *							
Ingress Protection	IP65							
Protection class								
CE	Yes							
*choice								
MECHANICAL DATA								
Foundation								
Column/body material	Aluminium							
Lampshade	Glass							
Metal color	White 9003							
	Grey 7043							
	Graphite 7016							
	Black 9005							
	RAL*							
ON ORDER								
DIM 2700°K 300 mA 5000°K 1050 mA	κν ^C ♀ ^O							

DETAILED DESCRIPTION

INDEX	NAZWA NAME	DIMENSIONS [cm]	SOURCE OF LIGHT			FIXTURE			WIND	WEIGHT
		L/B/H	W	Im	lm / W	W	lm	lm / W	m²	kg
195-1111-000035	DECO 32 M	50/50/45	32	4865	154	39	3600	92	0,12	6

**on special order

Data for: Ra > 80, 4000K, 700mA. Source of light and integrated control gear, replacement only by the manufacturer's service.