




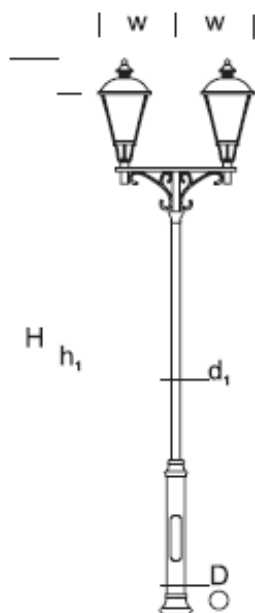

## Park Lantern GEDANUS PR 3,5

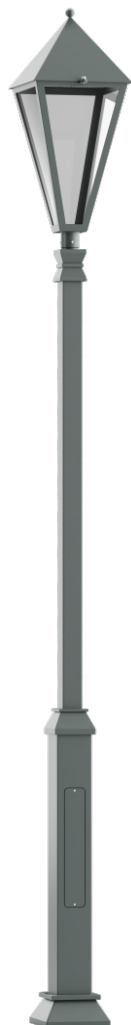

### OPTICS

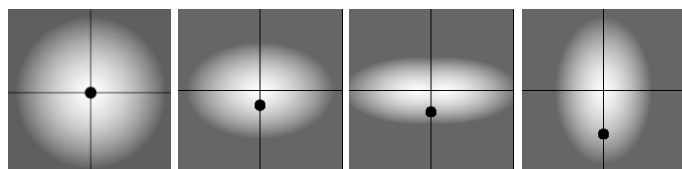

„S”

„AS”

„ASW”

„ASP”

### DETAILED DESCRIPTION

INDEX	NAZWA NAME	WYMIARY / DIMENSIONS (cm)		ŹRÓDŁO ŚWIATEŁA / SOURCE OF LIGHT			OPRAWA / FIXTURE			FUNDAMENT FOUNDATION
		H/h <sub>1</sub>	w/S	W	lm	lm / W	W	lm	lm / W	
190-1111-351002	GEDANUS PR LP 3,5	375/350	-/12x12/7x7	31,5	4850	154	36	3240	90	FBO-80/14,5

Data for: Ra > 80, 4000K, 700mA. Source of light and integrated control gear, replacement only by the manufacturer's service.



### PRODUCT DESCRIPTION

Classic lantern made of an aluminum construction. Its column is formed by a square profile with décors on which a frame or a 2- or 3-lighting arm system with a decorative element is mounted. Suggested fixture: Gedania LED


### TECHNICAL SPECIFICATIONS

Voltage	230 V
Source power / fixture	Recommended: Integrated 31,5 W/ 36 W
Lifetime	70.000 h LB 80/20
Optics	<b>S</b> <b>AS</b> <b>ASP</b> <b>ASW</b>
Ambient temperature	-30 ÷ +45
Light color	4000 3000 *
Ingress Protection	<b>IP65</b>
Protection class	<b>I</b> <b>II</b> *
CE	Yes


\* choice

### MECHANICAL DATA

Foundation	FBO-80/14,5
Column/body material	Aluminium
Lampshade	Polycarbonate
Metal color	



### ON ORDER



\*\* on special order